


F I G. 1

AXIAL DIRECTION OF THE CORD

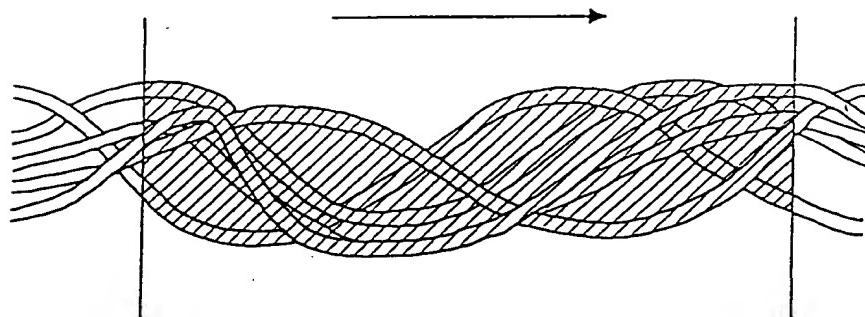

F I G. 2

AXIAL DIRECTION OF THE CORD



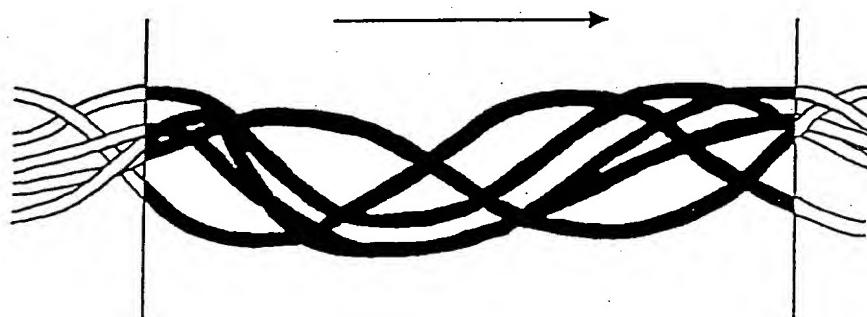



FIG. 3

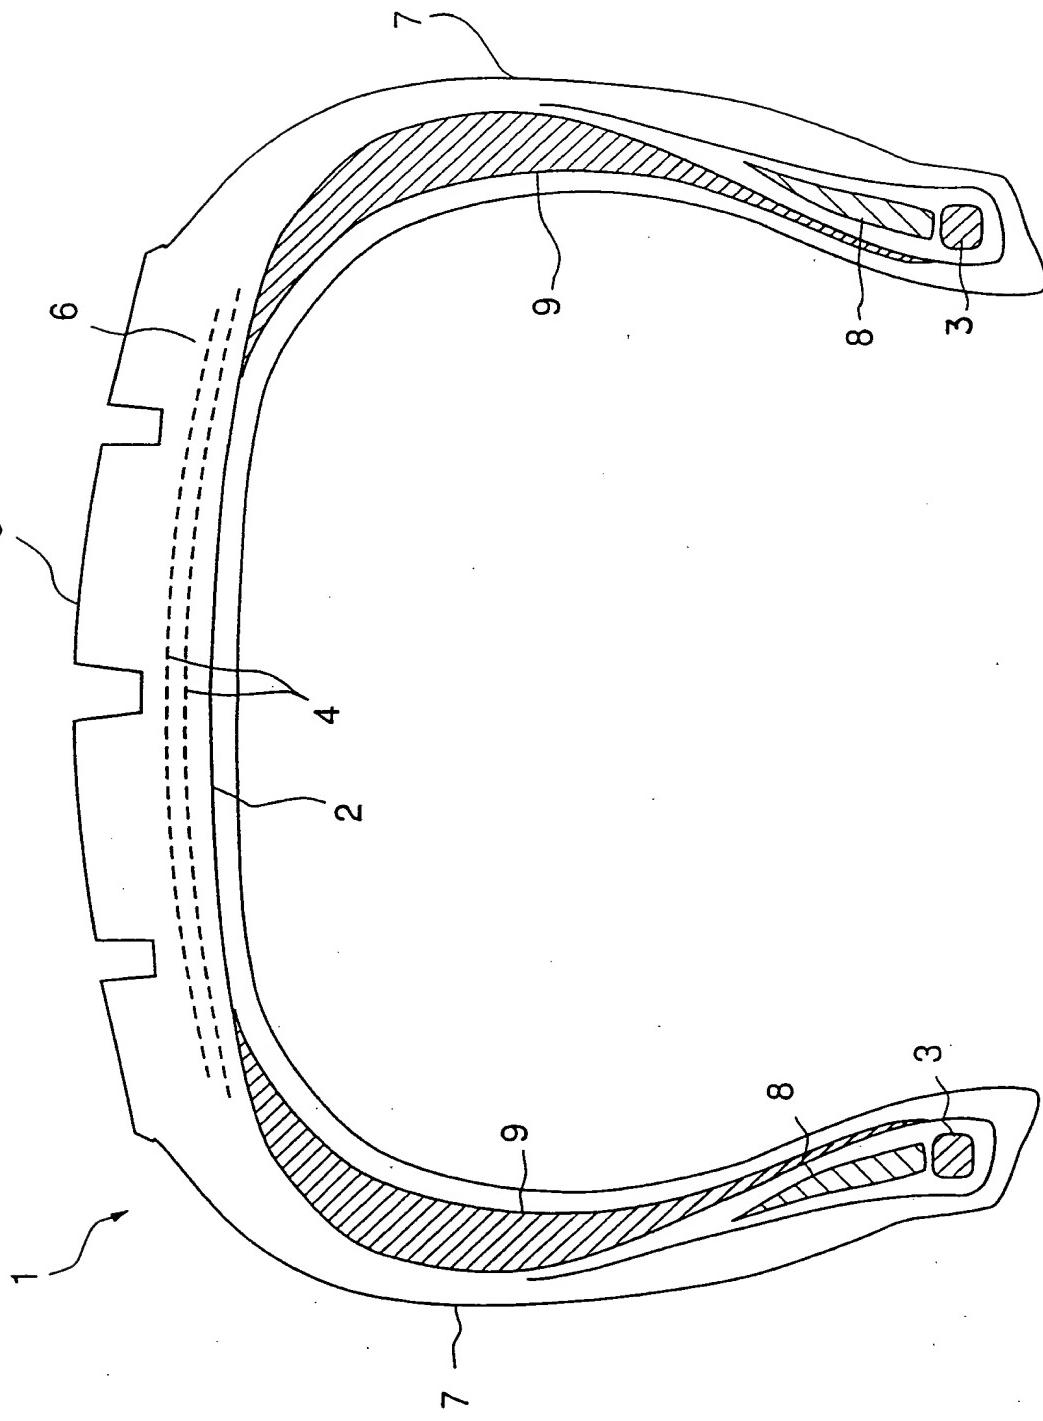

F I G. 4 A

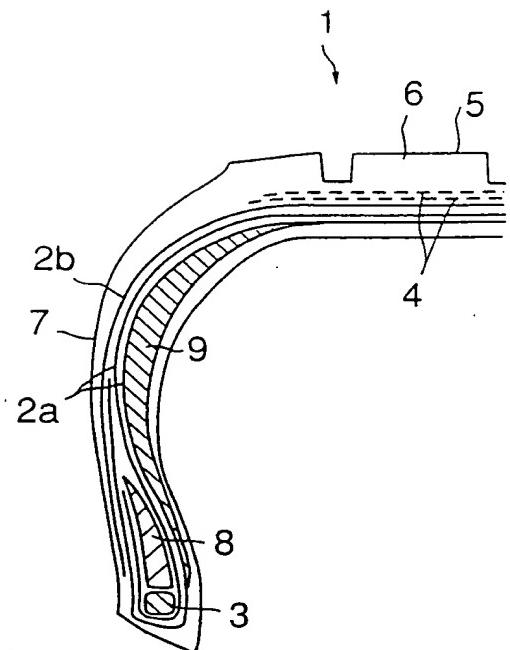


F I G. 4 B

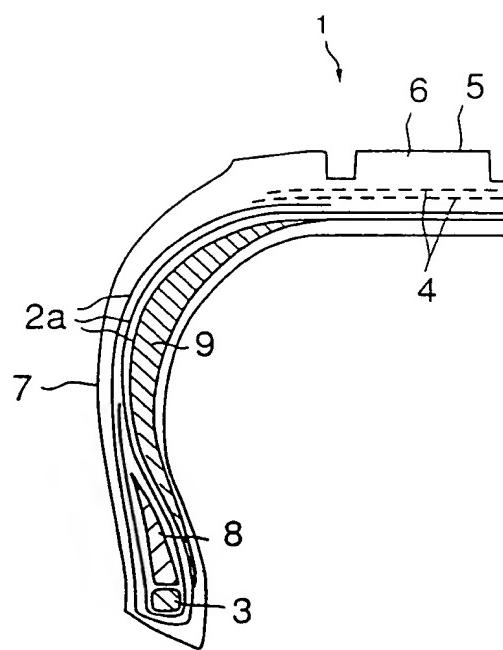

STRUCTURE 1


STRUCTURE 2

F I G. 4 C

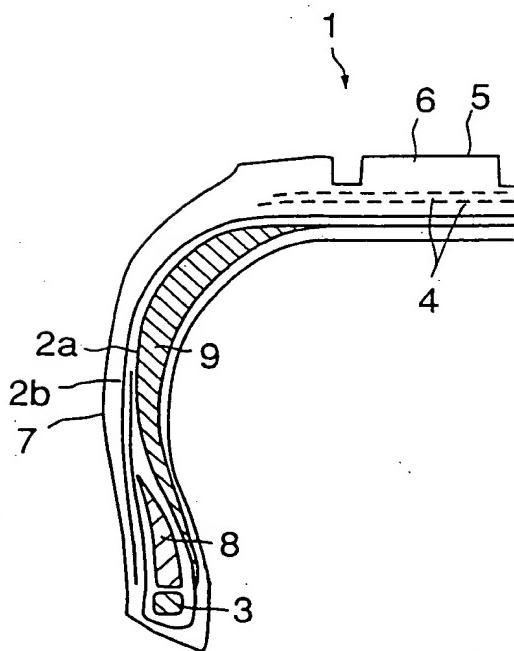


STRUCTURE 3

F I G. 4 D

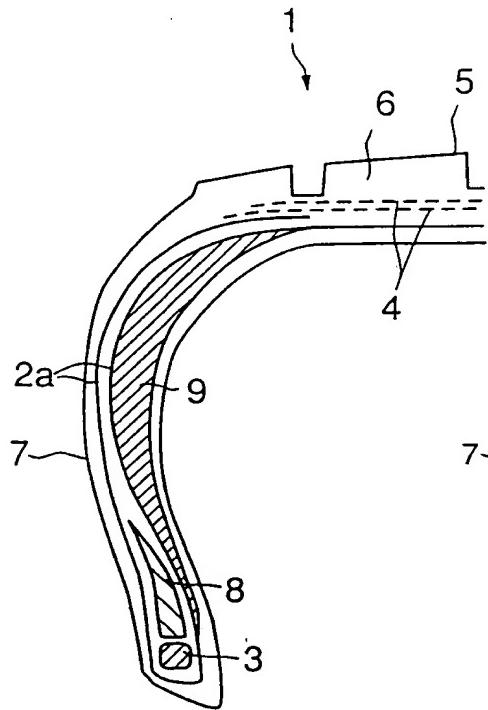


STRUCTURE 4

F I G. 4 E

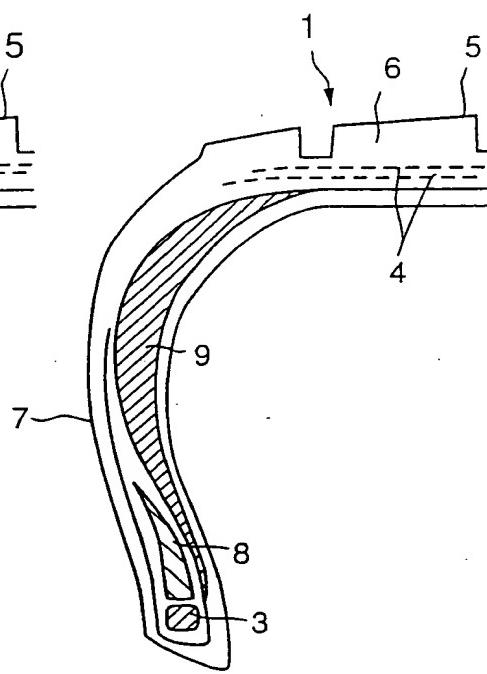


STRUCTURE 5

F I G. 5

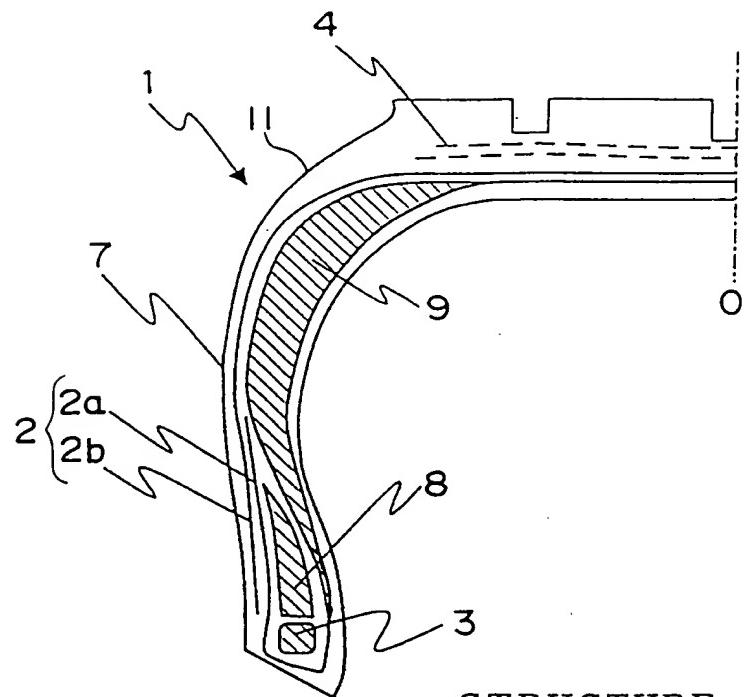


STRUCTURE 6

F I G. 6

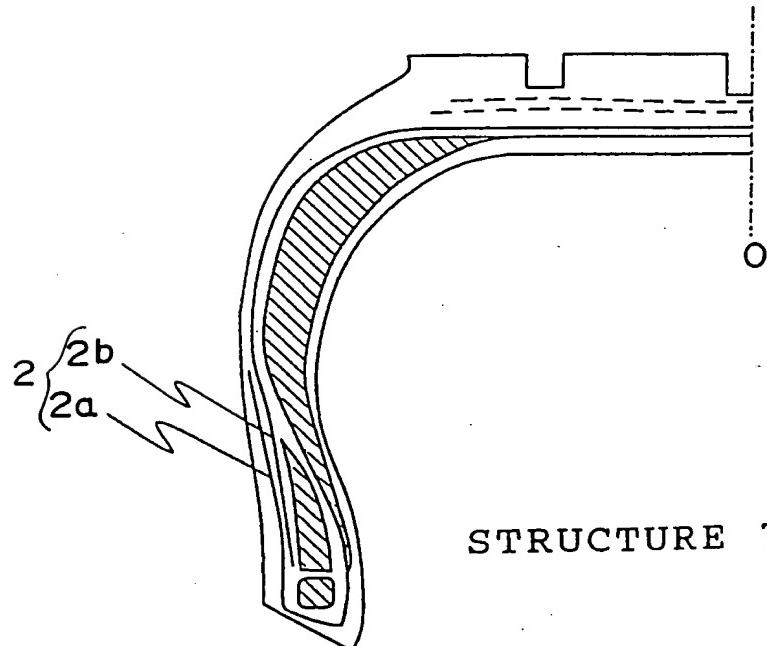


STRUCTURE 7

F I G. 7

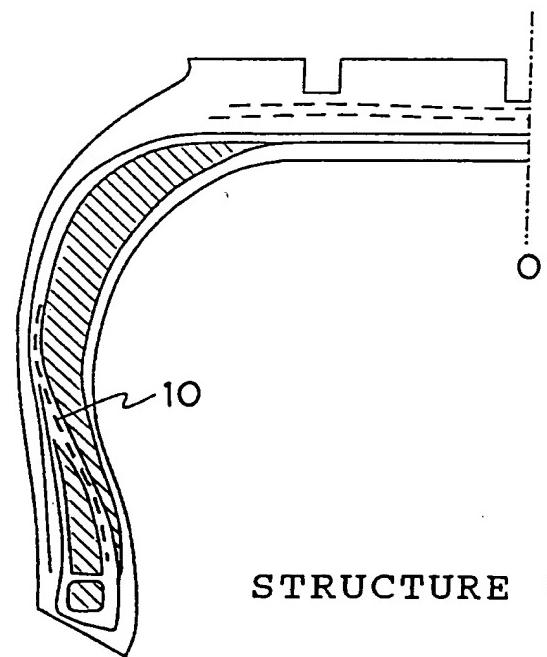


STRUCTURE 8

F I G. 8

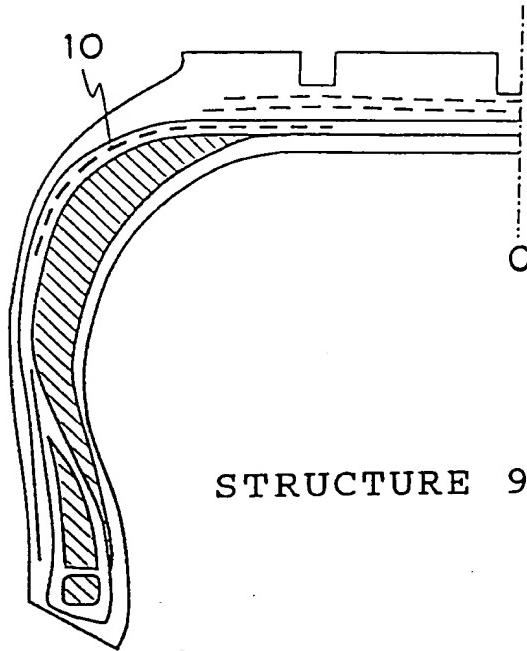


STRUCTURE 9

F I G. 9

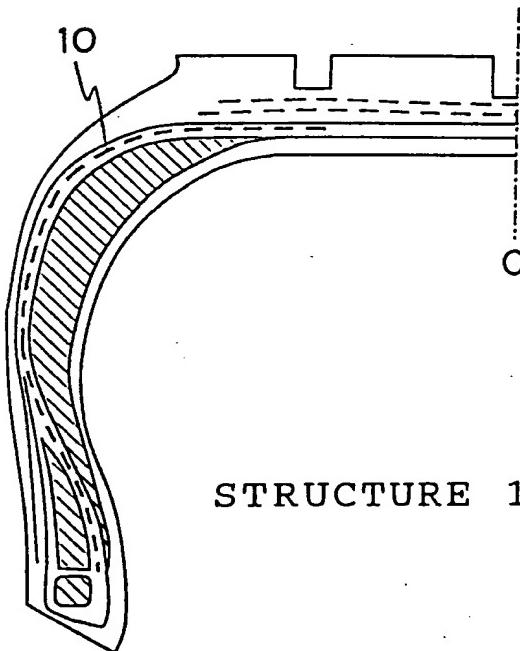


STRUCTURE 10

F I G. 1 0

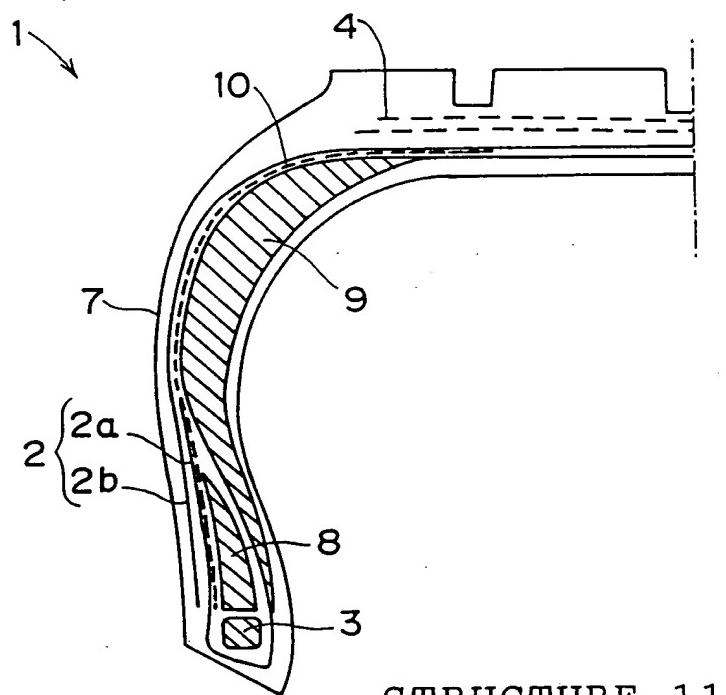


STRUCTURE 11


F I G. 11

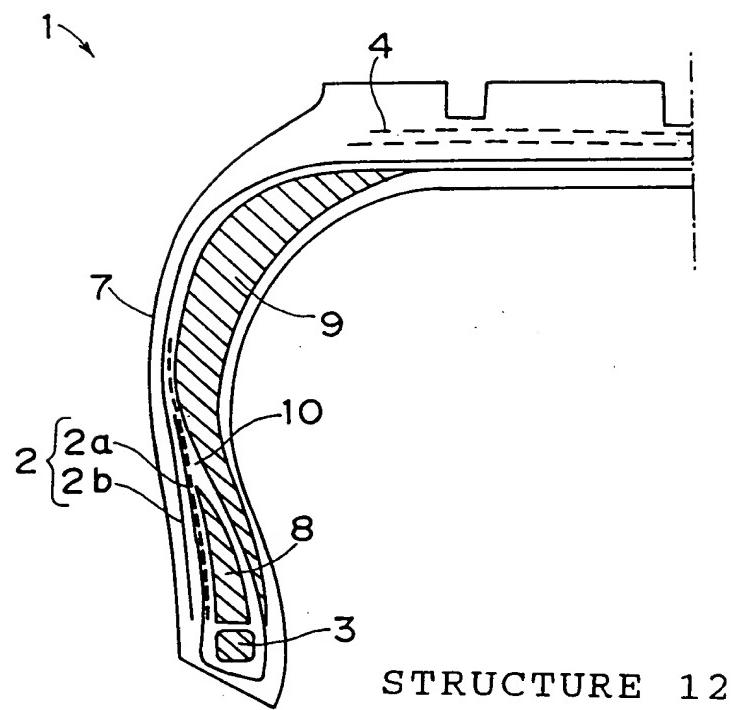


F I G. 1 2

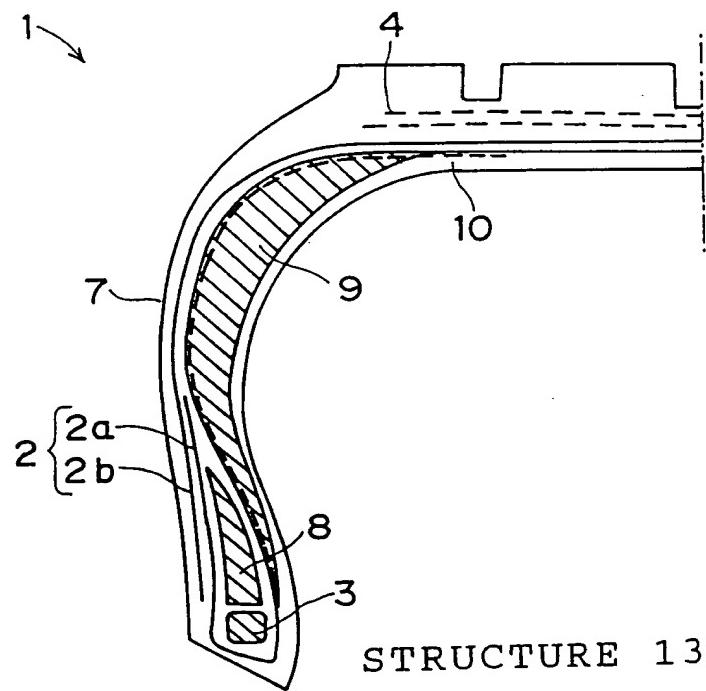

F I G. 1 3

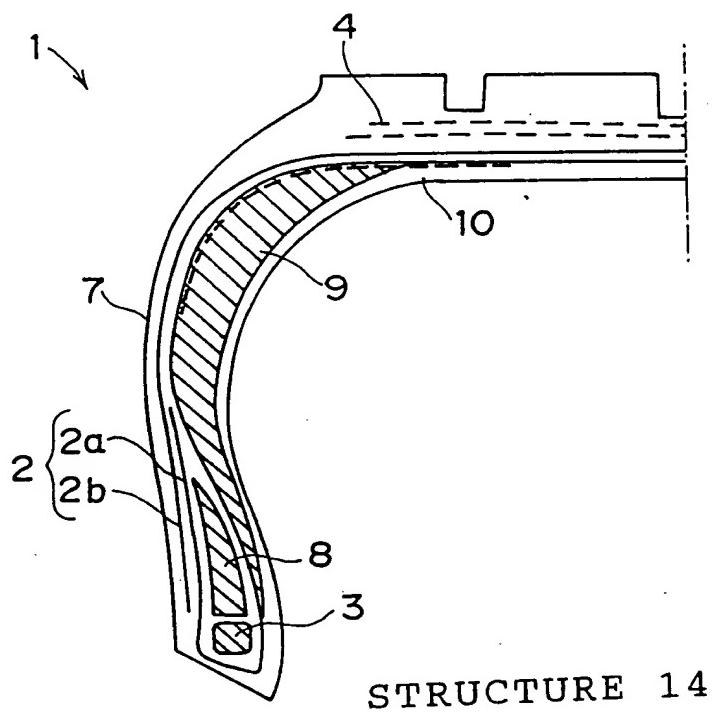


F I G. 1 4

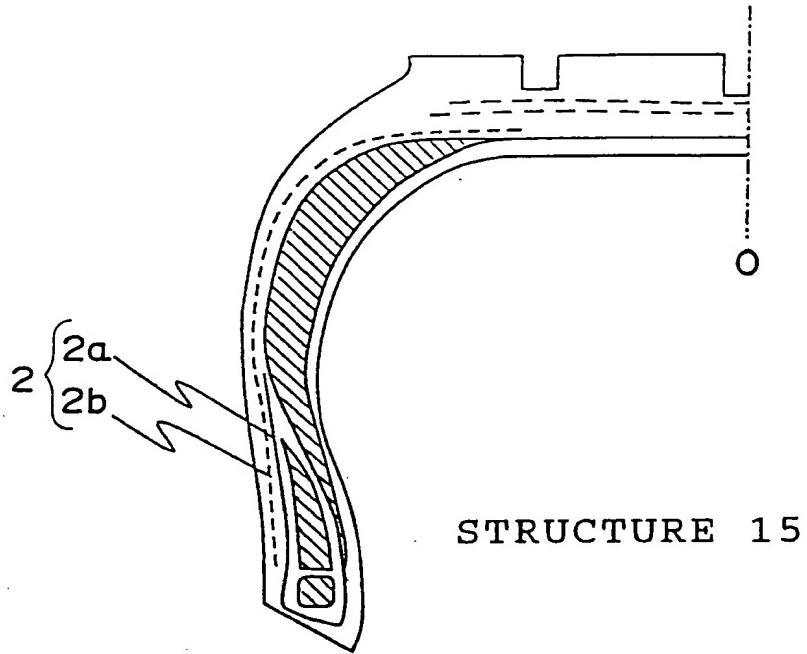


Tomohisa NISHIKAWA, et al.  
RUBBER-STEEL CORD COMPOSITE AND  
PNEUMATIC TIRE FOR PASSENGER CARS  
Filed May 7, 2001  
Our Ref: Q64382  
Telephone No.: 202-293-7060  
Sheet 13 of 14

F I G. 1 5

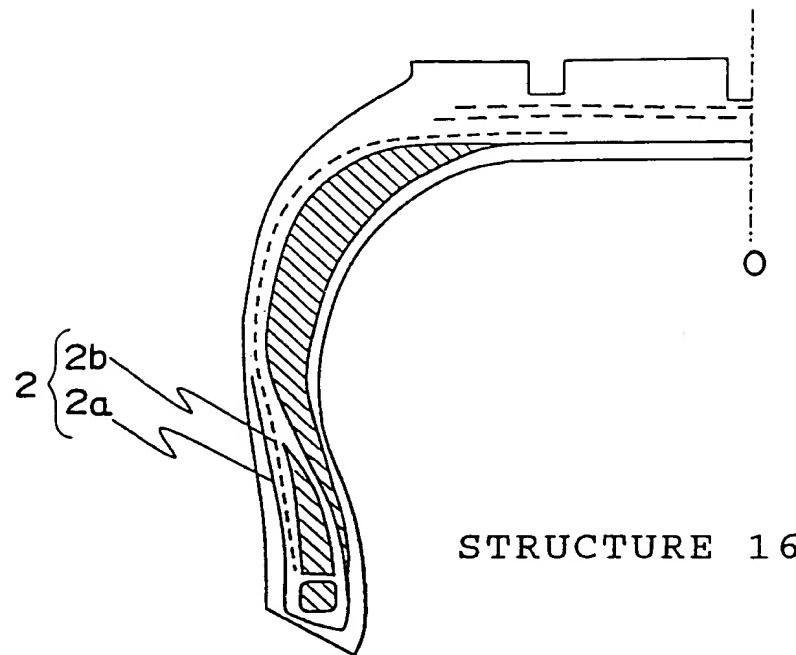

F I G. 1 6

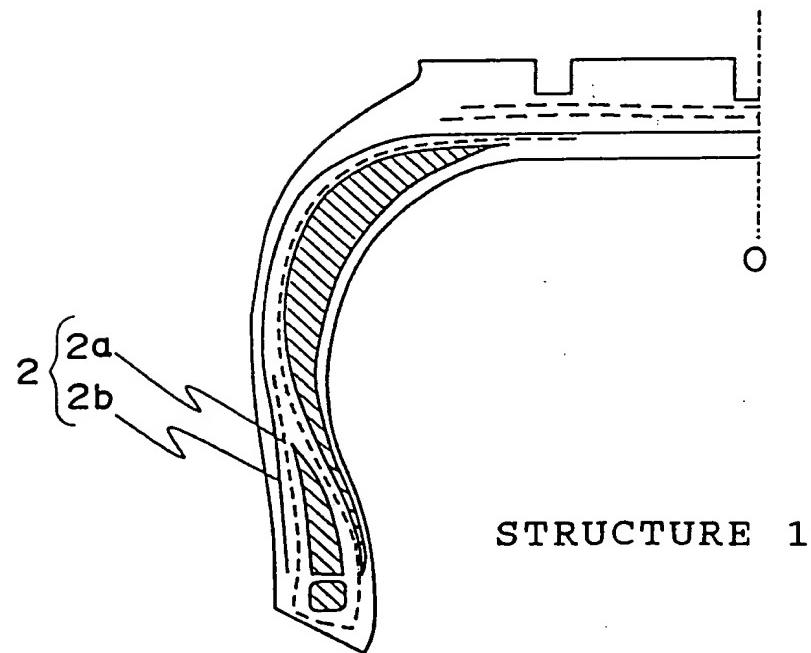

F I G. 1 7

